


NEWTON SLIM SPOTS



Design U.T. EgoLuce



Code	6471
Description	Adjustable recessed spotlight
Year of production	2019
Typology	recessed ceiling
Material	aluminium
Light Emission	<i>live</i>
IP grade	20
Allimentation	500mA - 17,5Vdc
Finishes	.01 White .02 Black
Light source	/W 8.7W 1223lm 17.5V 4000K CRI>90 /WW 8.7W 1156lm 17.5V 3000K CRI>90 /XW 8.7W 1106lm 17.5V 2700k CRI>90
Net weight	0,70 Kg
	5,10 cm

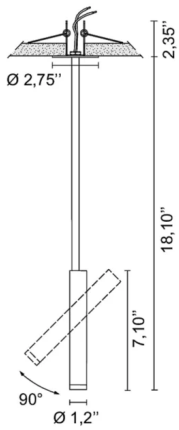

ACCESSORIES

Frangiluce - Louvres Lightbreak for Iris

0267/S

0,00 Kg

.01 White

.02 Black

NEWTON SLIM SPOTS



Design U.T. EgoLuce

Glass diffuser - sandblasted Pyrex Frosted Pyrex glass
diffuser for NEWTON SLIM

0265

0,10 Kg

.01  White

.02  Black



500 mA Driver 1 Spot

0149/COB

0,05 Kg

500 mA Driver 1 -2 Spot

0147/COB

0,02 Kg

Multi-power dimmable driver PUSH - 1....10V, 1-2 Spot
multipower dimmable led driver in continuous current

0141/DIM

0,00 Kg

.DIM  DIM



Multi -power DALI dimmable driver, 1-2 Spot dALI
multipower continuous current dimmable led driver

0141/DALI

0,00 Kg

.DALI  DALI



Multi-power dimmable driver PUSH - 1....10V, 1-3 Spot
multipower dimmable led driver in continuous current

0145

0,00 Kg



NEWTON SLIM SPOTS

Design U.T. Egoluce



Multi-power DALI dimmable driver, 1-3 Spot dALI
multipower continuous current dimmable led driver

0145/DALI 0,00 Kg

.DIM 1-10V-PUSH

.1-10V 1-10V

.DALI DALI

Phase-cut dimmable driver IGBT/TRIAC, 1 Spot

0734/DIM 0,10 Kg

.DIM DIM

Emergency Unit , 1 Spot LED Emergency Unit

0115/EM 0,43 Kg
