




Code	<b>4536</b>
Description	IP67 adjustable light bar for wall and ceiling applications, with diffused light made of transparent coextruded anti-UV methacrylate, AISI 316L stainless steel terminals and neoprene cable.
Year of production	2013
Typology	wall ceiling
Material	methacrylate/INOX AISI 316L
Light Emission	<i>widespread</i>
IP grade	67
Allimentation	24Vdc
Finishes	<b>.33</b> Brushed steel
Light source	<b>/W</b> 7.5W 920lm 24V 4000K CRI>90 <b>/WW</b> 7.5W 825lm 24V 3000K CRI>90 <b>/XW</b> 7.5W 780lm 24V 2700k CRI>90
Net weight	1,10 lb
	39,37 inch



## ACCESSORIES

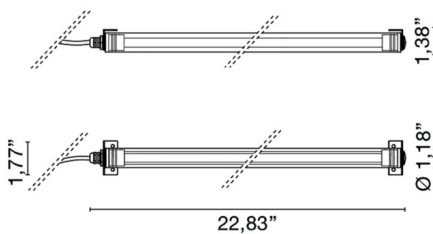

led constant voltage driver 24V 60W

**U0160/24**

0,00 lb



led constant voltage driver 24V 100W

**U0161/24**

0,00 lb

### Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

Ø	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
0,00"	10.5 W	A4536.33/78/XW	1092	A4536.33/78/WW	1155	A4536.33/78/W	1288
0,00"	12 W	A4536.33/88/XW	1248	A4536.33/88/WW	1320	A4536.33/88/W	1472
0,00"	13.5 W	A4536.33/98/XW	1404	A4536.33/98/WW	1485	A4536.33/98/W	1656
0,00"	1.5 W	A4536.33/18/XW	156	A4536.33/18/WW	165	A4536.33/18/W	184
0,00"	15 W	A4536.33/108/XW	1560	A4536.33/108/WW	1650	A4536.33/108/W	1840
0,00"	18 W	A4536.33/128/XW	1872	A4536.33/128/WW	1980	A4536.33/128/W	2208
0,00"	19.5 W	A4536.33/138/XW	2028	A4536.33/138/WW	2145	A4536.33/138/W	2392
0,00"	21 W	A4536.33/148/XW	2184	A4536.33/148/WW	2310	A4536.33/148/W	2576
0,00"	22.5 W	A4536.33/158/XW	2340	A4536.33/158/WW	2475	A4536.33/158/W	2760
0,00"	24 W	A4536.33/168/XW	2496	A4536.33/168/WW	2640	A4536.33/168/W	2944
0,00"	25.5 W	A4536.33/178/XW	2652	A4536.33/178/WW	2805	A4536.33/178/W	3128
0,00"	27 W	A4536.33/188/XW	2808	A4536.33/188/WW	2970	A4536.33/188/W	3312
0,00"	28.5 W	A4536.33/198/XW	2964	A4536.33/198/WW	3135	A4536.33/198/W	3496
0,00"	3 W	A4536.33/28/XW	312	A4536.33/28/WW	330	A4536.33/28/W	368
0,00"	30 W	A4536.33/208/XW	3120	A4536.33/208/WW	3300	A4536.33/208/W	3680
0,00"	31.5 W	A4536.33/218/XW	3276	A4536.33/218/WW	3465	A4536.33/218/W	3864
0,00"	33 W	A4536.33/228/XW	3432	A4536.33/228/WW	3630	A4536.33/228/W	4048
0,00"	34.5 W	A4536.33/238/XW	3588	A4536.33/238/WW	3795	A4536.33/238/W	4232
0,00"	36 W	A4536.33/248/XW	3744	A4536.33/248/WW	3960	A4536.33/248/W	4416
0,00"	37.5 W	A4536.33/258/XW	3900	A4536.33/258/WW	4125	A4536.33/258/W	4600
0,00"	4.5 W	A4536.33/38/XW	468	A4536.33/38/WW	495	A4536.33/38/W	552
0,00"	6 W	A4536.33/48/XW	624	A4536.33/48/WW	660	A4536.33/48/W	736
0,00"	9 W	A4536.33/68/XW	936	A4536.33/68/WW	990	A4536.33/68/W	1104
0,00"	16.5 W	4537.33/XW	1716	4537.33/WW	1815	4537.33/W	2024

<b>Ø</b>	<b>watt</b>	<b>2700K (XW)</b>	<b>lm</b>	<b>3000K (WW)</b>	<b>lm</b>	<b>4000K (W)</b>	<b>lm</b>
0,00"	7.5 W	4536.33/XW	780	4536.33/WW	825	4536.33/W	920