


Newton Micro & Mini /Segmento Mini & Dark

Design U.T. EGOLUCE



Codice	6722
Descrizione	Micro proiettore orientabile con attacco magnetico per installazioni su binari elettrificati Tiny a 24V a bassa tensione, con luce diretta e d'accento.
Anno di produzione	2022
Tipologia	track, sistema,
Materiale	alluminio
Emissione Luce	<i>diretta</i>
Grado IP	IP20
Allimentazione	24Vdc
Finiture	.02 ■ Nero
Sorgente luminosa	/WW 4W 310lm 24V 3000K /XW 4W 24V 2700k
Peso netto	0,09 lb




Newton Micro & Mini /Segmento Mini & Dark



Design U.T. EGOLUCE

ESEMPIO DI CONFIGURAZIONE

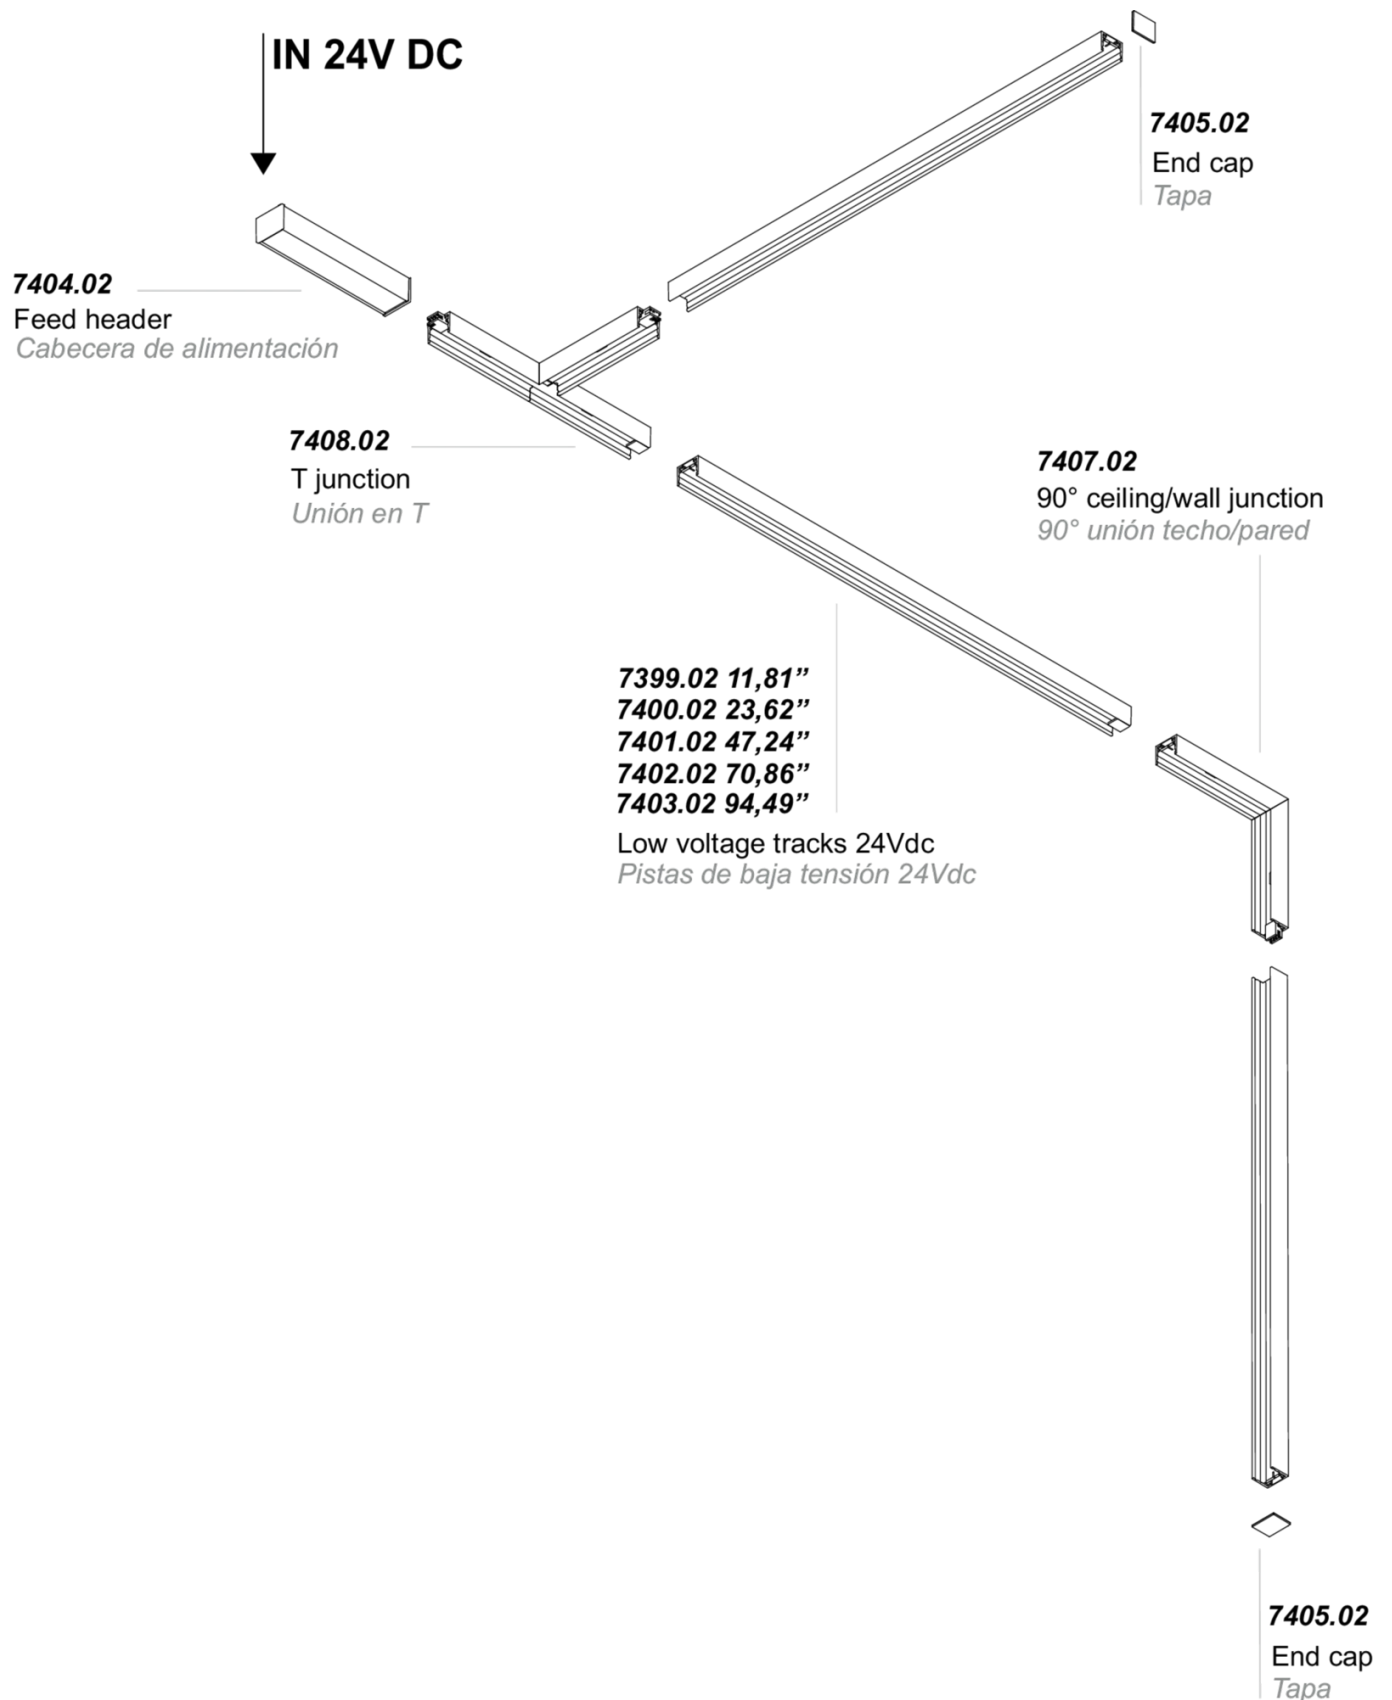

Newton Micro & Mini /Segmento Mini & Dark



Design U.T. EGOLUCE

ELEMENTI DI SISTEMA

Power head length 8 cm

7404

0,00 lb

.02  Nero



24v track end cap

7405

0,00 lb

.02  Nero



Rail connection set 24v length 1cm

7406

0,00 lb

.02  Nero



90° wall/ceiling junction length 8.6cm

7407

0,00 lb

.02  Nero



T-junction length 15cm

7408

0,00 lb

.02  Nero



Newton Micro & Mini /Segmento Mini & Dark

Design U.T. EGOLUCE



X-junction length 16.5 cm

7409

0,00 lb

.02  Nero



90° joint length 9 x 7.6 cm

7410

0,00 lb

.02  Nero



Low voltage 24V magnetic electrified track length 30cm for ceiling and wall applications.

7399

0,00 lb



Low voltage 24V magnetic electrified track 60cm long for ceiling and wall applications

7400

0,00 lb

.02  Nero



Low voltage 24V magnetic electrified track 120cm length for ceiling and wall applications

7401

0,00 lb

.02  Nero



Low voltage 24V magnetic electrified track 180cm length for ceiling and wall applications

7402

0,00 lb

.02  Nero



Low voltage 24V magnetic electrified track 180cm length for ceiling and wall applications

7403

0,00 lb

.02  Nero



ACCESSORI

Newton Micro & Mini /Segmento Mini & Dark

Design U.T. EGOLUCE



led driver a tensione costante 24V 60W

U0160/24

0,00 lb

led driver a tensione costante 24V 100W

U0161/24

0,00 lb

