

Code **6361**

Description IP67 walkable recessed radial spotlight with AISI 316L stainless steel flange, aluminum heat sink and 30 cm neoprene cable.

Year of production 2008

Typology recessed ceiling wall

Material INOX AISI 316L

Light Emission *indirect*

IP grade 67

Allimentation 350mA - 2,9Vdc

Finishes **.33** Brushed steel

Light source
/B 1.5W Blue Led
/W 1.5W 221lm 4000K
/WW 1.5W 210lm 3000K
/XW 1.5W 199lm 2700k


Net weight 0,22 lb



11,81 inch



1,26 inch

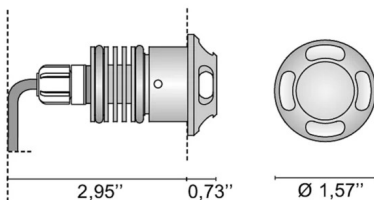


ACCESSORIES

Plastic Plastic Box Plastic back case

0216


0,00 lb



Kit draining junction box + IP connector Kit draining junction box + IP connector Kit: Drainage formwork + IP connector

0220

0,00 lb



led direct current driver 500mA

0127

0,00 lb



led direct current driver 350mA

0128

0,00 lb



multipower dimmable led driver in continuous current

0141/DIM

0,00 lb

.DIM DIM



dALI multipower continuous current dimmable led driver

0141/DALI

0,00 lb

.DALI DALI



multipower dimmable led driver in continuous current

0145

0,00 lb



dALI multipower continuous current dimmable led driver

0145/DALI

0,00 lb

.DIM 1-10V-PUSH

.1-10V 1-10V

.DALI DALI

