


Code	6358
Typology	recessed ceiling wall,
IP grade	44
Allimentation	350mA - 2,9Vdc
Finishes	.50 Crystal
Light source	/W 1W 158lm 4000K /WW 1W 150lm 3000K /XW 1W 143lm 2700k
Net weight	0,06 kg
	2,00 cm

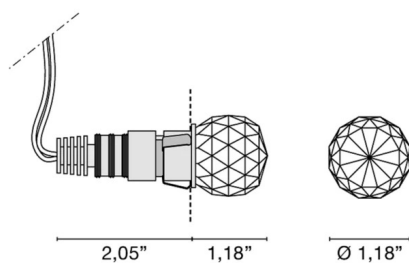


ACCESSORIES

Plastic Plastic Box Plastic back case

0215


0,00 kg



Kit: box + perforated plaster

0212

0,00 kg

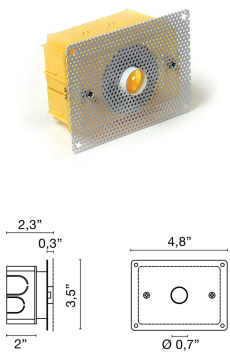

350 mA Driver 1-6 Spot


0125

0,02 kg

350 mA Driver 1-10 Spot led direct current driver 350mA

0128

0,00 kg



Multi-power dimmable driver PUSH - 1....10V, 5-14 Spot
multipower dimmable led driver in contiuous current

0141/DIM

0,00 kg

.DIM DIM



Multi -power DALI dimmable driver, 4-14 Spot dALI
multipower contiunous current dimmable led driver

0141/DALI
.DALI DALI

0,00 kg



Multi-power dimmable driver PUSH - 1....10V, 1-21 Spot
multipower dimmable led driver in contiunous current

0145

0,00 kg



Multi-power DALI dimmable driver, 1-21 Spot dALI
multipower contiunous current dimmable led driver

0145/DALI
.DIM 1-10V-PUSH
.1-10V 1-10V
.DALI DALI

0,00 kg

