


# Spooky

Design officinadiarchitettura&design

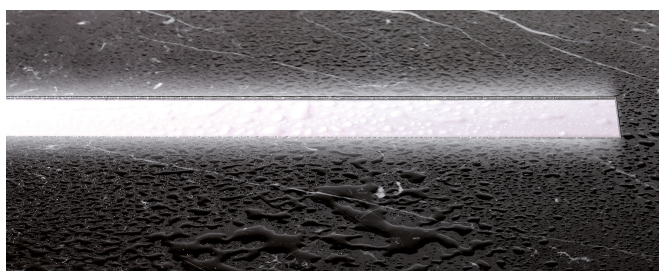

Code **6419**

Description IP67 walkable modular system for outdoor lighting with transparent coextruded methacrylate body and opal diffusing part, formwork and end caps made of anodized aluminum die with reinforced outdoor anodizing treatment.

Year of production 2013

Typology wall recessed recessed floor

Material methacrylate

Light Emission *live*

IP grade 67

Allimentation 24Vdc


Finishes **.01** White

Light source **/W** 13.4W 1620lm 24V 4000K CRI>90  
**/WW** 13.4W 1620lm 24V 3000K CRI>90


Net weight 5,07 lb



19,69 inch

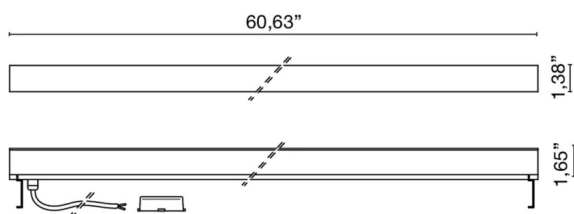

## EXAMPLE OF CONFIGURATION

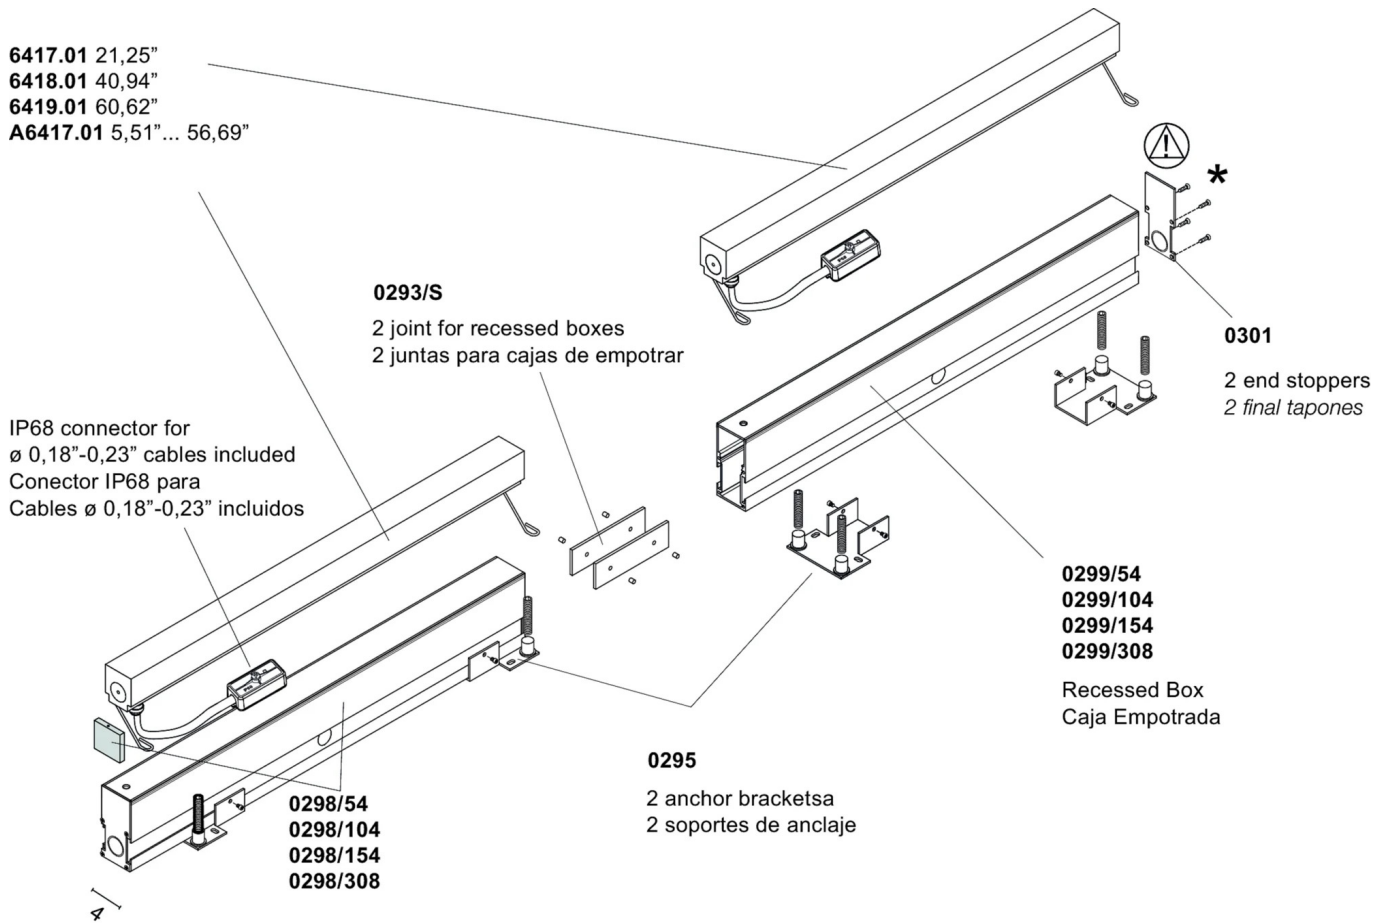

Starting recessed box with element for lamp maintenance.  
 Caja de empotrar de arranque con elemento para el mantenimiento de la lámpara.

\* The end stopper is included in the starting box. *El tope final está incluido en la caja de inicio.*

## ELEMENTI DI SISTEMA

	<b>0298</b>	0,00 lb
	<b>0299</b>	0,00 lb



**0295**

0,00 lb



**0293/S**

0,00 lb



**0301**

0,00 lb

## ACCESSORIES



**0298**

0,00 lb



**0299**

0,00 lb



**0295**

0,00 lb



**0293/S**

0,00 lb



**0301**

0,00 lb



led constant voltage driver 24V 60W

**U0160/24**

0,00 lb



led constant voltage driver 24V 100W

**U0161/24**

0,00 lb

## Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

Ø	watt	3000K (WW)	lm	4000K (W)	lm
0,00"	1 W	A6417.01/14/WW	102	A6417.01/14/W	108
0,00"	10.6 W	A6417.01/114/WW	1122	A6417.01/114/W	1188
0,00"	11.5 W	A6417.01/124/WW	1224	A6417.01/124/W	1296
0,00"	12.5 W	A6417.01/134/WW	1326	A6417.01/134/W	1404
0,00"	13.4 W	A6417.01/144/WW	1428	A6417.01/144/W	1512
0,00"	1.9 W	A6417.01/24/WW	204	A6417.01/24/W	216
0,00"	2.9 W	A6417.01/34/WW	306	A6417.01/34/W	324
0,00"	3.8 W	A6417.01/44/WW	408	A6417.01/44/W	432
0,00"	5.8 W	A6417.01/64/WW	612	A6417.01/64/W	648
0,00"	6.7 W	A6417.01/74/WW	714	A6417.01/74/W	756

<b>Ø</b>	<b>watt</b>	<b>3000K (WW)</b>	<b>lm</b>	<b>4000K (W)</b>	<b>lm</b>
0,00"	7.7 W	A6417.01/84/WW	816	A6417.01/84/W	864
0,00"	8.6 W	A6417.01/94/WW	918	A6417.01/94/W	972
0,00"	4.5 W	6417.01/WW	510	6417.01/W	540
0,00"	8.9 W	6418.01/WW	1020	6418.01/W	1080