




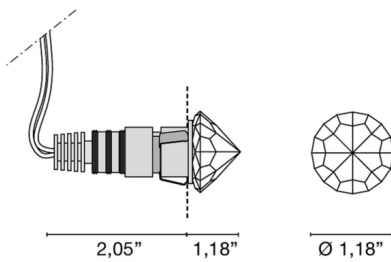

Code	6360
Description	Recessed spotlight (IP44) with diffused light with hand-ground lead crystal diffuser, chrome-plated aluminum flange and anodized aluminum heat sink.
Year of production	2009
Typology	recessed ceiling wall,
Material	aluminum/crystal
Light Emission	<i>live</i>
IP grade	IP44
Allimentation	350mA - 2,9Vdc
Finishes	.50 Crystal
Light source	/W 1W 158lm 4000K /WW 1W 150lm 3000K /XW 1W 143lm 2700k
Net weight	0,07 lb
	7,87 inch
	0,79 inch





ACCESSORIES

 	<p>Plastic back case</p>	<p>0215</p>	<p>0,00 lb</p>
--	--------------------------	--------------------	----------------

 	<p>Kit: box + perforated plaster</p>	<p>0212</p>	<p>0,00 lb</p>
---	--------------------------------------	--------------------	----------------

 	<p>led direct current driver 350mA</p>	<p>0128</p>	<p>0,00 lb</p>
--	--	--------------------	----------------

	<p>multipower dimmable led driver in continuous current</p>	<p>0141/DIM .DIM  DIM</p>	<p>0,00 lb</p>
---	---	--	----------------

dALI multipower continuous current dimmable led driver

0141/DALI

0,00 lb

.DALI DALI



multipower dimmable led driver in continuous current

0145

0,00 lb



dALI multipower continuous current dimmable led driver

0145/DALI

0,00 lb

.PUSH PUSH

.1-10V 1-10V

.DALI DALI

