


Spooky

Design ABS Studio

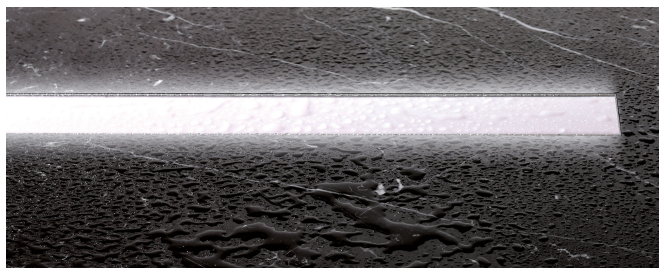

Code **6418**

Description IP67 walkable modular system for outdoor lighting with transparent coextruded methacrylate body and opal diffusing part, formwork and end caps made of anodized aluminum die with reinforced outdoor anodizing treatment.

Year of production 2013

Typology wall recess, recessed floor,

Material methacrylate

Light Emission *live*

IP grade IP67

Allimentation 24Vdc


Finishes **.01** White

Light source **/W** 8.9W 1080lm 24V 4000K CRI>90
/WW 8.9W 1020lm 24V 3000K CRI>90


Net weight 3,53 lb



19,69 inch

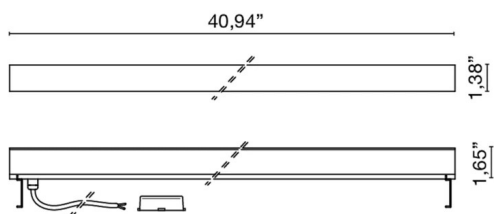

EXAMPLE OF CONFIGURATION

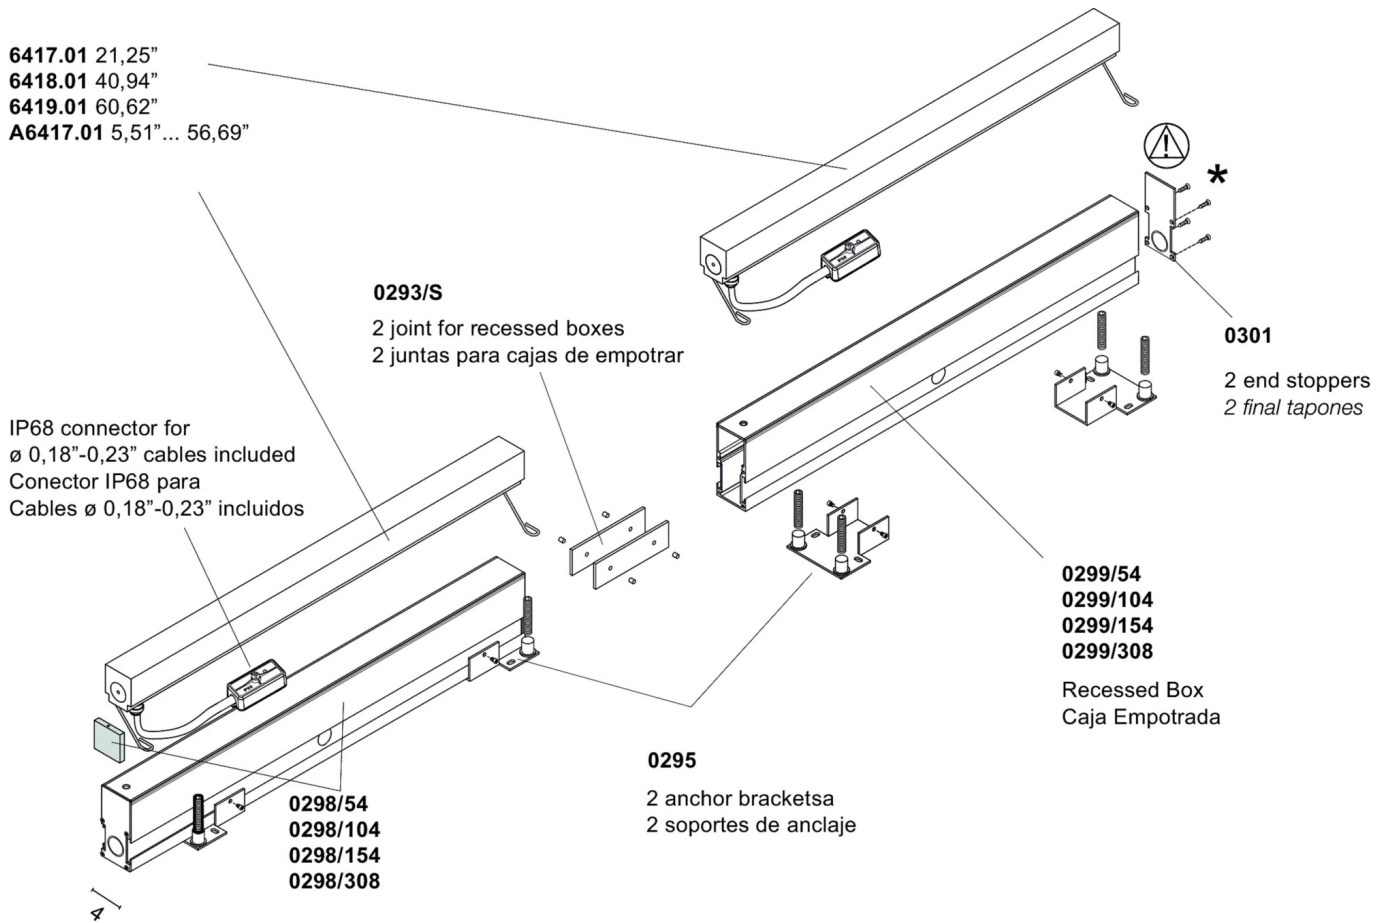

Starting recessed box with element for lamp maintenance.
 Caja de empotrar de arranque con elemento para el mantenimiento de la lámpara.

* The end stopper is included in the starting box. *El tope final está incluido en la caja de inicio.*

ELEMENTI DI SISTEMA



0298 0,00 lb



0299 0,00 lb



0295

0,00 lb



0293/S

0,00 lb



0301

0,00 lb

ACCESSORIES



0298

0,00 lb



0299

0,00 lb



0295

0,00 lb



0293/S

0,00 lb



0301

0,00 lb



led constant voltage driver 24V 60W

U0160/24

0,00 lb



led constant voltage driver 24V 100W

U0161/24

0,00 lb

Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

inches	Ø	watt	3000K (WW)	lm	4000K (W)	lm
5,51"	0,00"	1 W	A6417.01/14/WW	102	A6417.01/14/W	108
44,88"	0,00"	10.6 W	A6417.01/114/WW	1122	A6417.01/114/W	1188
48,82"	0,00"	11.5 W	A6417.01/124/WW	1224	A6417.01/124/W	1296
52,76"	0,00"	12.5 W	A6417.01/134/WW	1326	A6417.01/134/W	1404
56,69"	0,00"	13.4 W	A6417.01/144/WW	1428	A6417.01/144/W	1512
9,45"	0,00"	1.9 W	A6417.01/24/WW	204	A6417.01/24/W	216
13,39"	0,00"	2.9 W	A6417.01/34/WW	306	A6417.01/34/W	324
17,32"	0,00"	3.8 W	A6417.01/44/WW	408	A6417.01/44/W	432
25,20"	0,00"	5.8 W	A6417.01/64/WW	612	A6417.01/64/W	648
29,13"	0,00"	6.7 W	A6417.01/74/WW	714	A6417.01/74/W	756

inches	Ø	watt	3000K (WW)	lm	4000K (W)	lm
33,07"	0,00"	7.7 W	A6417.01/84/WW	816	A6417.01/84/W	864
37,01"	0,00"	8.6 W	A6417.01/94/WW	918	A6417.01/94/W	972
21,26"	0,00"	4.5 W	6417.01/WW	510	6417.01/W	540
40,94"	0,00"	8.9 W	6418.01/WW	1020	6418.01/W	1080