


Code	6389
Description	IP67 walkable recessed spotlight with direct/diffused light with AISI 316L stainless steel flange, aluminum heat sink and 30 cm neoprene cable.
Year of production	2012
Typology	recessed ceiling wall floor,
Material	INOX AISI 316L
Light Emission	<i>direct/broadcast</i>
IP grade	IP67
Allimentation	350mA - 2,9Vdc
Finishes	.33 Brushed steel
Light source	/B 1.5W 221lm Blue Led /W 1.5W 221lm 4000K /WW 1.5W 210lm 3000K /XW 1.5W 199lm 2700k
Net weight	0,44 lb
	11,81 inch
	1,50 inch

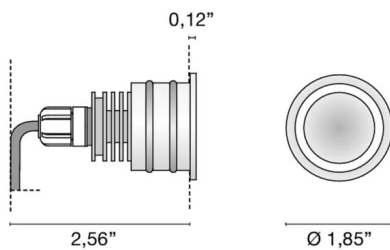

ACCESSORIES

	<p>Plastic back case</p>	<p>0217</p>	<p>0,00 lb</p>
--	--------------------------	--------------------	----------------

	<p>Kit: Drainage formwork + IP connector</p>	<p>0250</p>	<p>0,00 lb</p>
--	--	--------------------	----------------

	<p>led direct current driver 500mA</p>	<p>0127</p>	<p>0,00 lb</p>
--	--	--------------------	----------------

	<p>led direct current driver 350mA</p>	<p>0128</p>	<p>0,00 lb</p>
--	--	--------------------	----------------

multipower dimmable led driver in continuous current

0141/DIM

0,00 lb

.DIM DIM



dALI multipower continuous current dimmable led driver

0141/DALI

0,00 lb

.DALI DALI



multipower dimmable led driver in continuous current

0145

0,00 lb



dALI multipower continuous current dimmable led driver

0145/DALI

0,00 lb

.PUSH PUSH

.1-10V 1-10V

.DALI DALI

