




Code	6391
Description	Recessed (IP44) direct/diffuse spotlight with anodized aluminum body and satin methacrylate diffuser.
Year of production	2012
Typology	recessed ceiling wall,
Material	aluminium
Light Emission	<i>direct/broadcast</i>
IP grade	IP44
Allimentation	350mA - 2,9Vdc
Finishes	.01 White
Light source	/W 1.5W 221lm 4000K /WW 1.5W 210lm 3000K /XW 1.5W 199lm 2700k
Net weight	0,09 lb
	7,87 inch
	1,18 inch

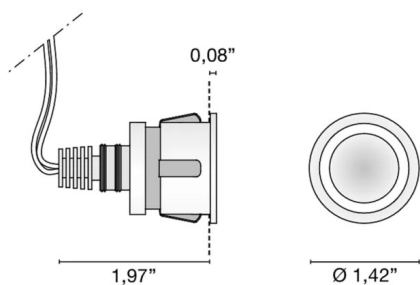


ACCESSORIES

Plastic back case

0216



0,00 lb



Kit: box + perforated plaster

0213

0,00 lb



led direct current driver 500mA

0127

0,00 lb



led direct current driver 350mA

0128

0,00 lb



multipower dimmable led driver in continuous current

0141/DIM

0,00 lb

.DIM DIM



dALI multipower continuous current dimmable led driver

0141/DALI

0,00 lb

.DALI DALI



multipower dimmable led driver in continuous current

0145

0,00 lb



dALI multipower continuous current dimmable led driver

0145/DALI

0,00 lb

.PUSH PUSH

.1-10V 1-10V

.DALI DALI

