




Code	<b>6371</b>
Description	IP67 outdoor walkable recessed spotlight with AISI 316L stainless steel flange and aluminum heat sink, equipped with clear safety glass and 30 cm neoprene cable.
Year of production	2010
Typology	recessed ceiling wall floor,
Material	INOX AISI 316L
Light Emission	<i>live</i>
IP grade	IP67
Allimentation	500mA - 8,7Vdc
Finishes	<b>.33</b> Brushed steel
Light source	<b>/W</b> 4.5W 663lm 4000K <b>/WW</b> 4.5W 630lm 3000K <b>/XW</b> 4.5W 597lm 2700k
Net weight	0,88 lb
	11,81 inch
	3,35 inch




## ACCESSORIES

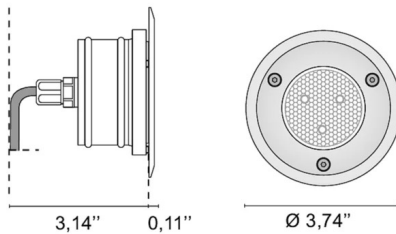

Kit: Tris drainage formwork + IP connector

**0231**

0,00 lb

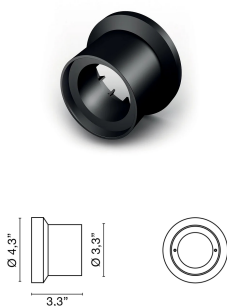

Wall formwork

**0235**

0,00 lb



Drywall spring for TRIS

**0233**

0,12 lb



led direct current driver 500mA

**0127**

0,00 lb

 	<p>led direct current driver 350mA</p>	<p><b>0128</b></p>	<p>0,00 lb</p>
	<p>multipower dimmable led driver in continuous current</p>	<p><b>0141/DIM</b> <b>.DIM</b>  DIM</p>	<p>0,00 lb</p>
	<p>dALI multipower continuous current dimmable led driver</p>	<p><b>0141/DALI</b> <b>.DALI</b>  DALI</p>	<p>0,00 lb</p>
	<p>multipower dimmable led driver in continuous current</p>	<p><b>0145</b></p>	<p>0,00 lb</p>
	<p>dALI multipower continuous current dimmable led driver</p>	<p><b>0145/DALI</b> <b>.PUSH</b> PUSH <b>.1-10V</b>  1-10V <b>.DALI</b>  DALI</p>	<p>0,00 lb</p>