


Code	6348
Description	IP67 walkable recessed spotlight with AISI 316L stainless steel round flange, aluminum heat sink and 30 cm neoprene cable.
Year of production	2008
Typology	recessed ceiling wall floor
Material	INOX AISI 316L
Light Emission	<i>live</i>
IP grade	67
Allimentation	500mA - 2,9Vdc
Finishes	.33 Brushed steel
Light source	/W 1.5W 221lm 4000K /WW 1.5W 210lm 3000K /XW 1.5W 199lm 2700k
Net weight	0,18 lb
	11,81 inch
	1,26 inch

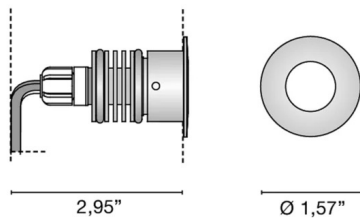


ACCESSORIES

Plastic Plastic Box Plastic back case

0216


0,00 lb



Kit draining junction box + IP connector Kit draining junction box + IP connector Kit: Drainage formwork + IP connector

0220

0,00 lb



led direct current driver 500mA

0127

0,00 lb



led direct current driver 350mA

0128

0,00 lb



multipower dimmable led driver in continuous current

0141/DIM

0,00 lb

.DIM DIM



dALI multipower continuous current dimmable led driver

0141/DALI

0,00 lb

.DALI DALI



multipower dimmable led driver in continuous current

0145

0,00 lb



dALI multipower continuous current dimmable led driver

0145/DALI

0,00 lb

.DIM 1-10V-PUSH

.1-10V 1-10V

.DALI DALI

