




Code	<b>6323</b>
Description	Square recessed spotlight IP40 aluminum structure, anodized aluminum heat sink and methacrylate front lens.
Year of production	2007
Typology	recessed ceiling wall,
Material	aluminium
Light Emission	<i>live</i>
IP grade	IP40
Allimentation	500mA - 2,9Vdc
Finishes	<b>.01</b> White <b>.32</b> Satin nickel
Light source	<b>/W</b> 1.5W 221lm 4000K <b>/WW</b> 1.5W 210lm 3000K <b>/XW</b> 1.5W 210lm 2700k
Net weight	0,13 lb
	7,87 inch
	1,26 inch

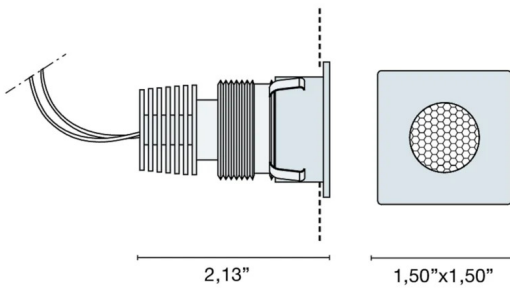

## ACCESSORIES

Slat adapter for PIX

**0209**

0,02 lb



Plastic box

**0234**



0,06 lb



Kit: box + perforated plaster

**0213**

0,00 lb



led direct current driver 500mA

**0127**

0,00 lb



 	<p>led direct current driver 350mA</p>	<p><b>0128</b></p>	<p>0,00 lb</p>
	<p>multipower dimmable led driver in continuous current</p>	<p><b>0141/DIM</b>  <b>.DIM</b>  DIM</p>	<p>0,00 lb</p>
	<p>dALI multipower continuous current dimmable led driver</p>	<p><b>0141/DALI</b>  <b>.DALI</b>  DALI</p>	<p>0,00 lb</p>
	<p>multipower dimmable led driver in continuous current</p>	<p><b>0145</b></p>	<p>0,00 lb</p>
	<p>dALI multipower continuous current dimmable led driver</p>	<p><b>0145/DALI</b>  <b>.PUSH</b> PUSH  <b>.1-10V</b>  1-10V  <b>.DALI</b>  DALI</p>	<p>0,00 lb</p>