




Code **6615**

Description	LINEA is offered in different modular lengths from 12 cm up to 302 cm, in three shades of light, 2700K, 3000K, 4000K with CRI>90
Year of production	2012
Typology	recessed ceiling wall,
Material	methacrylate/aluminum
Light Emission	<i>live</i>
IP grade	IP40
Allimentation	24Vdc
Finishes	.01 White
Light source	/W 15W 1840lm 24V 4000K CRI>90 /WW 15W 1650lm 24V 3000K CRI>90 /XW 15W 1560lm 24V 2700k CRI>90
Net weight	1,10 lb
	11,81 inch
	0,00 inch

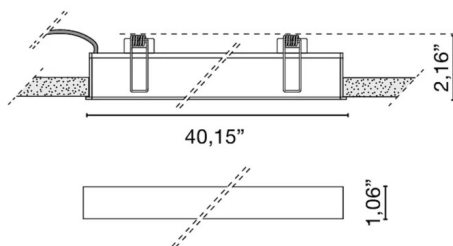


ACCESSORIES

Formwork 101.8 cm for Linea

0210_100


0,00 lb



Formwork 151.8 cm for Linea

0210_150


0,00 lb



Optional corner profile to facilitate installation in plasterboard

0242/100

0,22 lb



led constant voltage driver 24V 60W

U0160/24

0,00 lb



led constant voltage driver 24V 100W

U0161/24

0,00 lb



Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

inches	Ø	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
--------	---	------	------------	----	------------	----	-----------	----

inches	Ø	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
40,16"	0,00"	15 W	6615.01/XW	1560	6615.01/WW	1650	6615.01/W	1840
27,56"	0,00"	10.5 W	A6615.01/70/XW	1092	A6615.01/70/WW	1155	A6615.01/70/W	1288
31,50"	0,00"	12 W	A6615.01/80/XW	1248	A6615.01/80/WW	1320	A6615.01/80/W	1472
35,43"	0,00"	13.5 W	A6615.01/90/XW	1404	A6615.01/90/WW	1485	A6615.01/90/W	1656
3,94"	0,00"	1.5 W	A6615.01/10/XW	156	A6615.01/10/WW	165	A6615.01/10/W	184
43,31"	0,00"	16.5 W	A6615.01/110/XW	1716	A6615.01/110/WW	1815	A6615.01/110/W	2024
47,24"	0,00"	18 W	A6615.01/120/XW	1872	A6615.01/120/WW	1980	A6615.01/120/W	2208
51,18"	0,00"	19.5 W	A6615.01/130/XW	2028	A6615.01/130/WW	2145	A6615.01/130/W	2392
55,12"	0,00"	21 W	A6615.01/140/XW	2184	A6615.01/140/WW	2310	A6615.01/140/W	2576
62,99"	0,00"	24 W	A6615.01/160/XW	2496	A6615.01/160/WW	2640	A6615.01/160/W	2944
66,93"	0,00"	25.5 W	A6615.01/170/XW	2652	A6615.01/170/WW	2805	A6615.01/170/W	3128
70,87"	0,00"	27 W	A6615.01/180/XW	2808	A6615.01/180/WW	2970	A6615.01/180/W	3312
74,80"	0,00"	28.5 W	A6615.01/190/XW	2964	A6615.01/190/WW	3135	A6615.01/190/W	3496
7,87"	0,00"	3 W	A6615.01/20/XW	312	A6615.01/20/WW	330	A6615.01/20/W	368
78,74"	0,00"	30 W	A6615.01/200/XW	3120	A6615.01/200/WW	3300	A6615.01/200/W	3680
82,68"	0,00"	31.5 W	A6615.01/210/XW	3276	A6615.01/210/WW	3465	A6615.01/210/W	3864
86,61"	0,00"	33 W	A6615.01/220/XW	3432	A6615.01/220/WW	3630	A6615.01/220/W	4048
90,55"	0,00"	34.5 W	A6615.01/230/XW	3588	A6615.01/230/WW	3795	A6615.01/230/W	4232
94,49"	0,00"	36 W	A6615.01/240/XW	3744	A6615.01/240/WW	3960	A6615.01/240/W	4416
98,43"	0,00"	37.5 W	A6615.01/250/XW	3900	A6615.01/250/WW	4125	A6615.01/250/W	4600
11,81"	0,00"	4.5 W	A6615.01/30/XW	468	A6615.01/30/WW	495	A6615.01/30/W	552
15,75"	0,00"	6 W	A6615.01/40/XW	624	A6615.01/40/WW	660	A6615.01/40/W	736
19,69"	0,00"	7.5 W	A6615.01/50/XW	780	A6615.01/50/WW	825	A6615.01/50/W	920
23,62"	0,00"	9 W	A6615.01/60/XW	936	A6615.01/60/WW	990	A6615.01/60/W	1104
59,84"	0,00"	22.5 W	6616.01/XW		6616.01/WW		6616.01/W	