




Code	<b>6321</b>
Typology	recessed ceiling wall,
IP grade	40
Allimentation	350mA - 2,9Vdc
Finishes	.01  White .32  Satin nickel
Light source	/W 1W 158lm 4000K /WW 1W 150lm 3000K /XW 1W 143lm 2700k
Net weight	0,02 kg
	2,00 cm

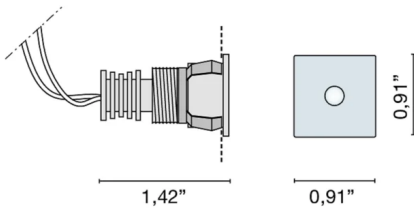

## ACCESSORIES

Slat adapter for DOT

**0208**


0,01 kg



Plastic Plastic Box Plastic back case

**0215**



0,00 kg



Kit: box + perforated plaster

**0212**

0,00 kg



350 mA Driver 1-6 Spot

**0125**

0,02 kg

350 mA Driver 1-10 Spot led direct current driver 350mA

**0128**

0,00 kg



Multi-power dimmable driver PUSH - 1....10V, 5-14 Spot  
multipower dimmable led driver in continuous current

**0141/DIM**

0,00 kg

**.DIM** DIM





Multi -power DALI dimmable driver, 4-14 Spot dALI  
multipower contiunous current dimmable led driver

**0141/DALI**  
**.DALI** DALI

0,00 kg



Multi-power dimmable driver PUSH - 1....10V, 1-21 Spot  
multipower dimmable led driver in contiunous current

**0145**

0,00 kg



Multi-power DALI dimmable driver, 1-21 Spot dALI  
multipower contiunous current dimmable led driver

**0145/DALI**  
**.PUSH** PUSH  
**.1-10V** 1-10V  
**.DALI** DALI

0,00 kg