


Code	6358
Description	Recessed spotlight (IP44) with diffused light with hand-ground lead crystal diffuser, chrome-plated aluminum flange and anodized aluminum heat sink.
Year of production	2009
Typology	recessed ceiling wall
Material	aluminum/crystal
Light Emission	<i>live</i>
IP grade	44
Allimentation	350mA - 2,9Vdc
Finishes	.50 Crystal
Light source	/W 1W 158lm 4000K /WW 1W 150lm 3000K /XW 1W 143lm 2700k
Net weight	0,13 lb
	7,87 inch
	0,79 inch

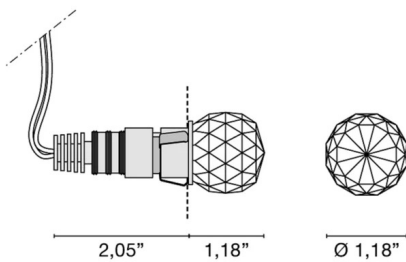

ACCESSORIES

 	<p>Plastic Plastic Box Plastic back case</p>	<p>0215</p>	<p>0,00 lb</p>
 	<p>Box + Perforated Plaster Kit: box + perforated plaster</p>	<p>0212</p>	<p>0,00 lb</p>
 	<p>350 mA Driver 1-10 Spot led direct current driver 350mA</p>	<p>0128</p>	<p>0,00 lb</p>
	<p>multipower dimmable led driver in contiuous current</p>	<p>0141/DIM .DIM DIM</p>	<p>0,00 lb</p>

dALI multipower continuous current dimmable led driver

0141/DALI

0,00 lb

.DALI DALI



multipower dimmable led driver in continuous current

0145

0,00 lb



dALI multipower continuous current dimmable led driver

0145/DALI

0,00 lb

.DIM 1-10V-PUSH

.1-10V 1-10V

.DALI DALI

